

# Quick Installation Guide

## USB2.0 or 1394A FireWire/USB2.0 Enclosures (HEXD2UB)

Aluminum Enclosure for 2.5" Hard Disk Drive (hard disk up to 9mm height)

For more information, please refer to the user manual on the CD.

Note: The diagrams below are using the HEXD2UB as an example




1. Unscrew to loosen the Back Panel and remove the it from the Enclosure.




2. Use both thumbs to push the Bottom Tray out.



3. Remove the Circuit Board from the Bottom Tray.

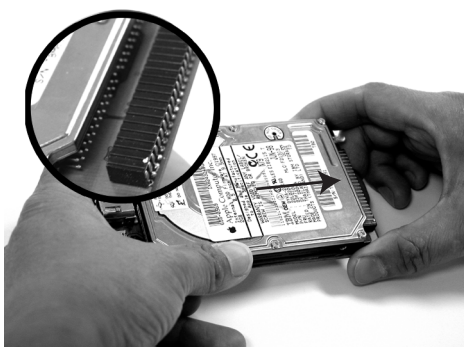



4. Align the pins on the hard drive to the 44-pin connector on the Circuit Board, and push the pins all the way in.

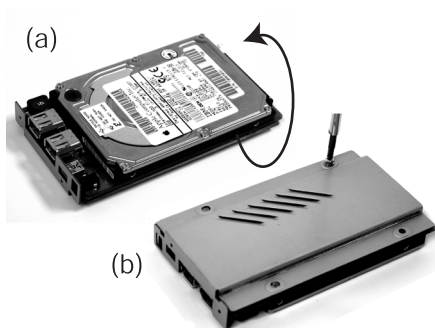

5. (a) Seat the Circuit Board and hard drive on the Bottom Tray. (b) Secure the hard drive with Screws (5mm in diameter) on the bottom of the tray.



6. Align the Bottom Tray to the Sleeve Slot. Slide and push the hard drive/ Bottom Tray into the Enclosure Sleeve.

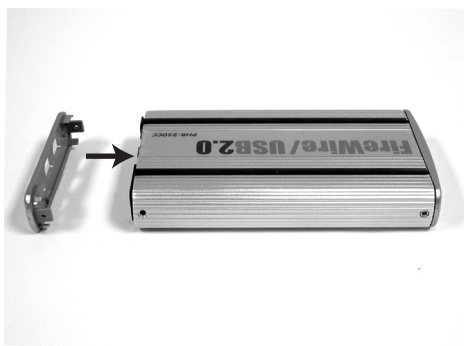

7. Put the Back Panel back to the Enclosure.



8. Secure the Back Panel with 2 screws (3mm in diameter) from each side.



9. Connect the Enclosure directly to the computer by using the USB or FireWire cable and it is now ready to use.